


D12-XXX300

Door type: door panel width mm (X_{total}), max opening mm

D12-XXX300: 500 - 3000 mm, 520 - 3020 mm

XXX= Height on posts

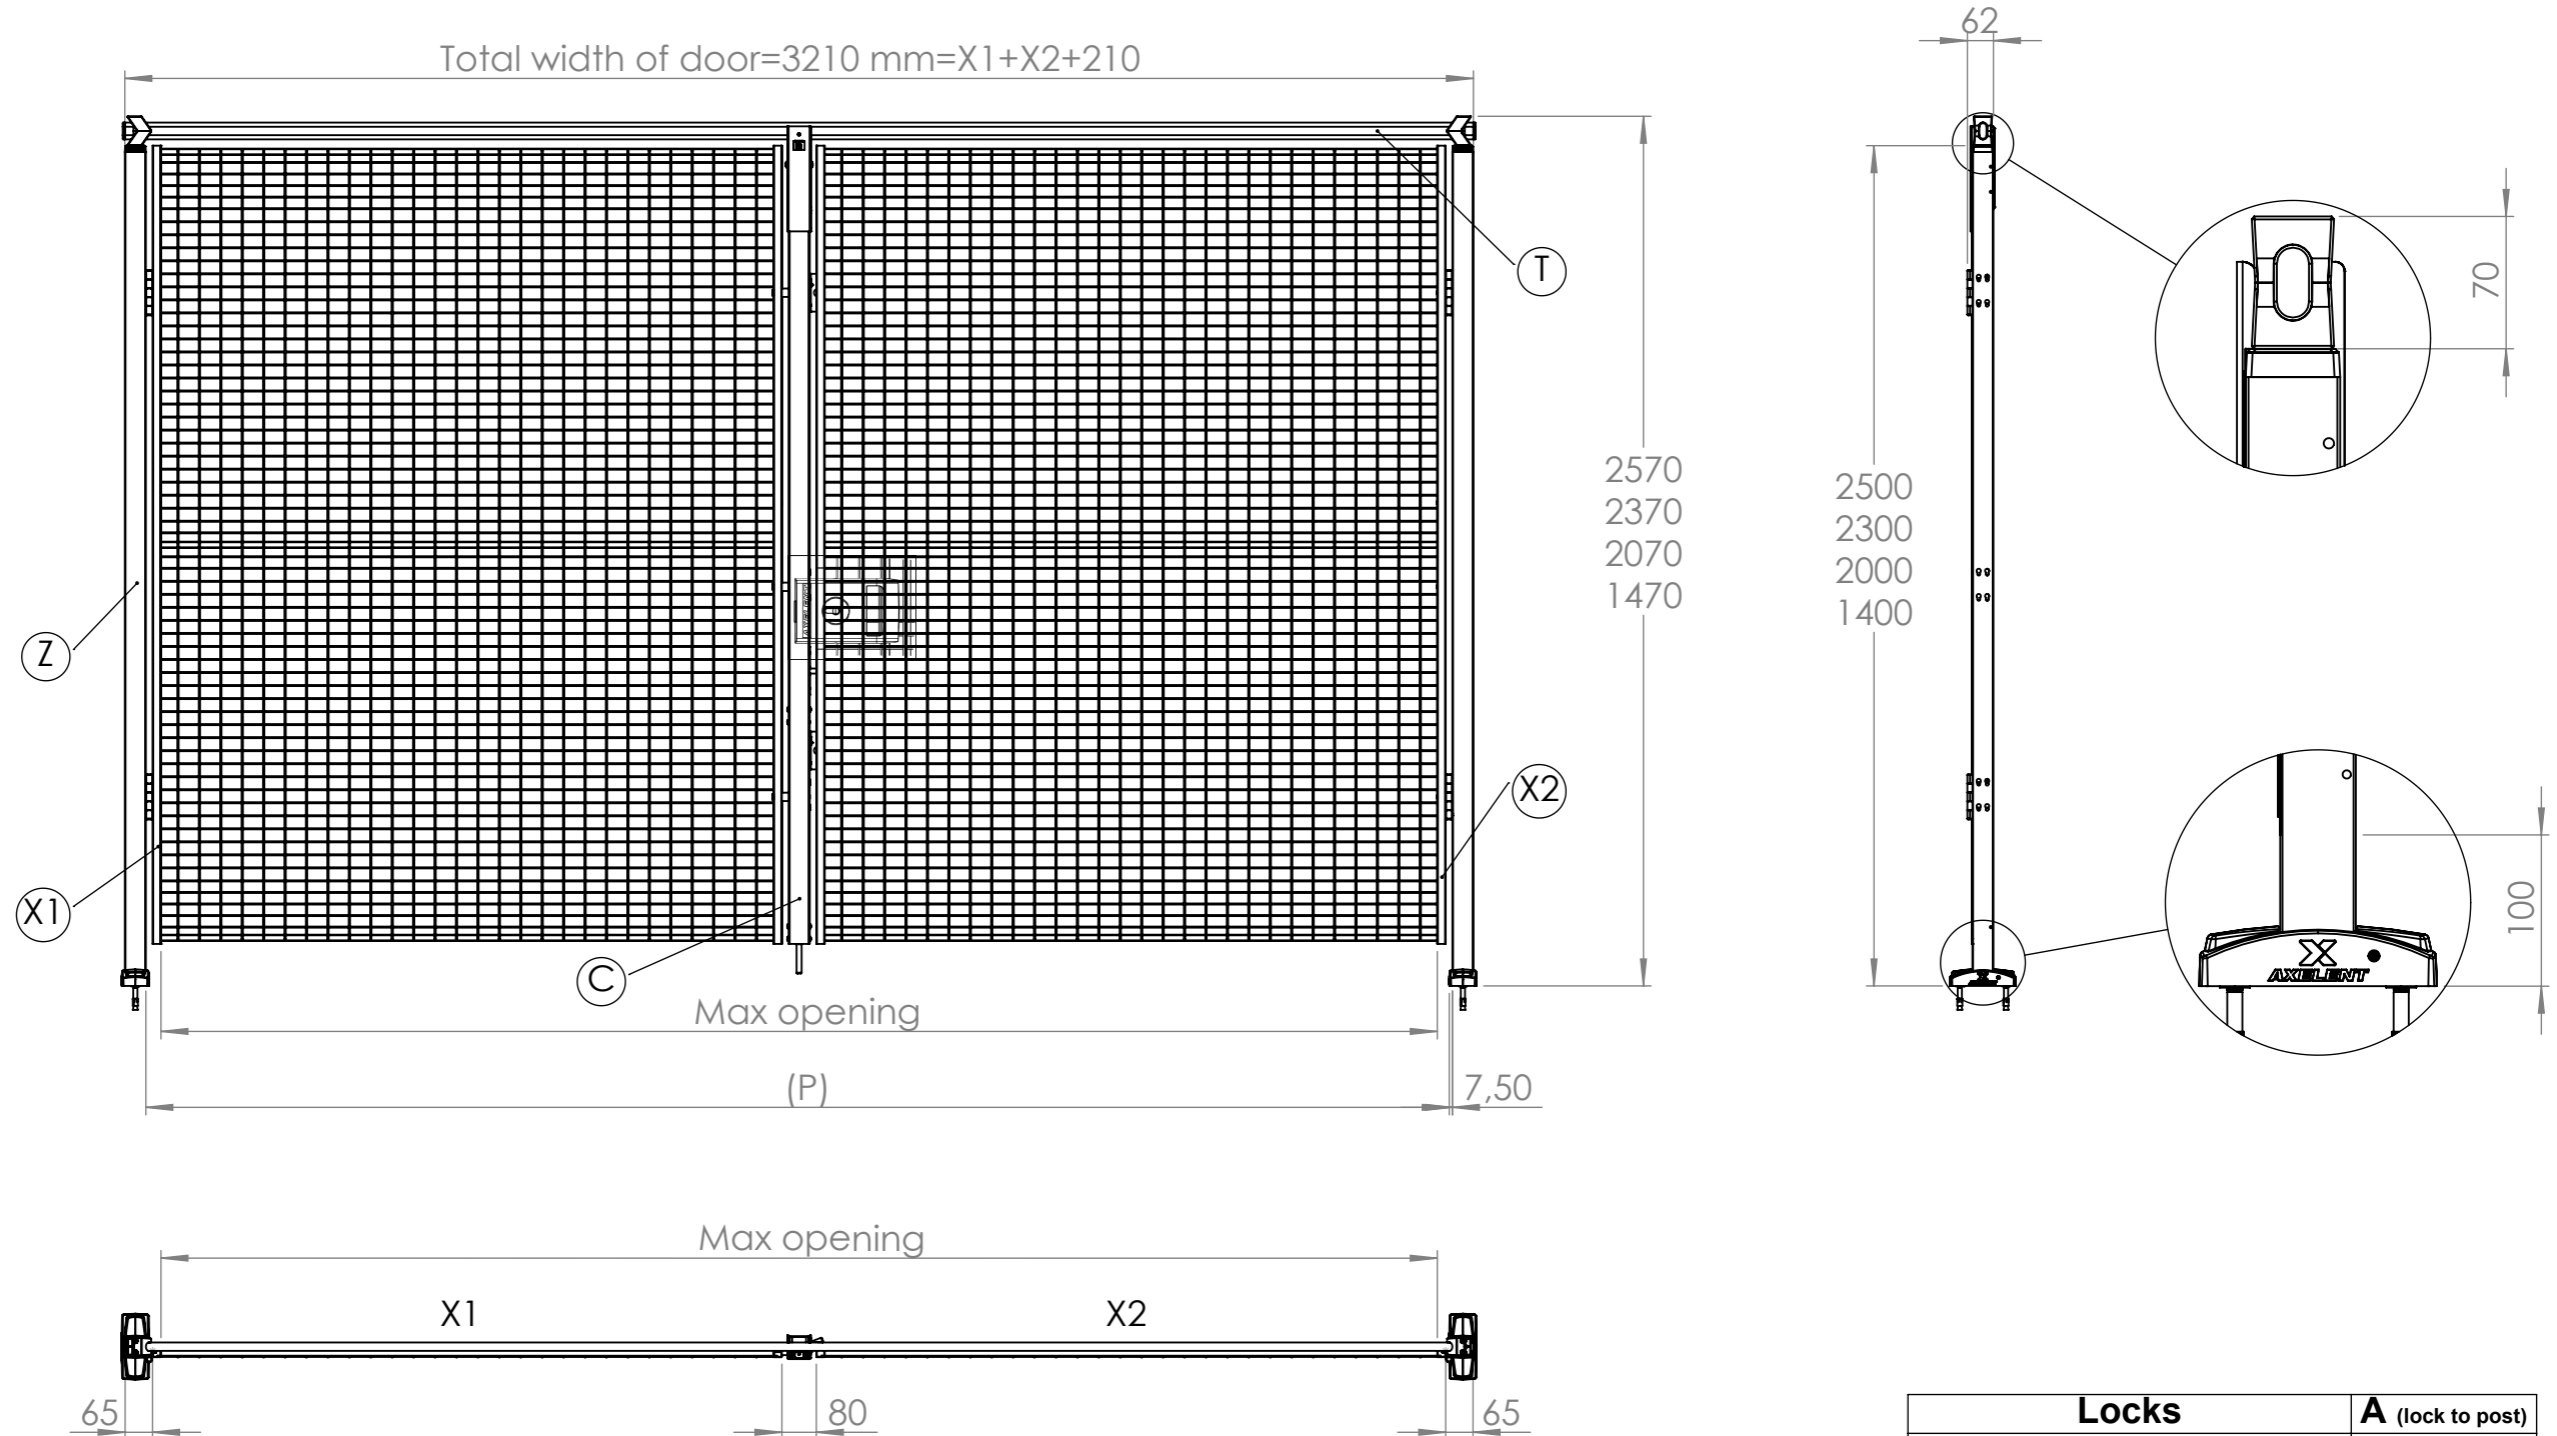

Max opening = X (total panel width) + 20 mm (20 mm = (50 + (15x2) - (30x2)) (panel width in open position)) mm
 (P) Post to post opening = X (total panel width) + 110 mm** (**= center post + space between panels and posts in closed position (110 mm = 50 + (15x4) mm)
 Max opening is affected by "A" mm with lock (without door accessories*)

| Item No. | Art No. | Qty. |
|----------|------------|------|
| X (1,2) | 322-XXXXXX | 2 |
| C | D3M1-XXX | 1 |
| T | D3K-XXX | 1 |
| Z | P11-XXX | 2 |

| Locks | A (lock to post) |
|-------------------------------|------------------|
| L20-05-0 (Snap lock) | - |
| L20-05-2 (Hitch lock) | - |
| XIT-L/R01-301 (Cylinder lock) | - |
| XIT-L/R14-301 (Slam shut) | - |
| XIT-L/R09-301 (Electric) | - |
| L66-20/21-L/R (X-lock) | - |
| B-135 (MGB) | - |
| B-136 (MGB Escape Release) | - |