


D24-XXX140/290

Door type: *door panel width mm (X_{total}), max opening mm (both sides)*

D24-XXX140: 250 - 1500 mm, 131 - 1381 mm

D24-XXX290: 1600 - 3000 mm, 1481 - 2881 mm

XXX= Height on posts

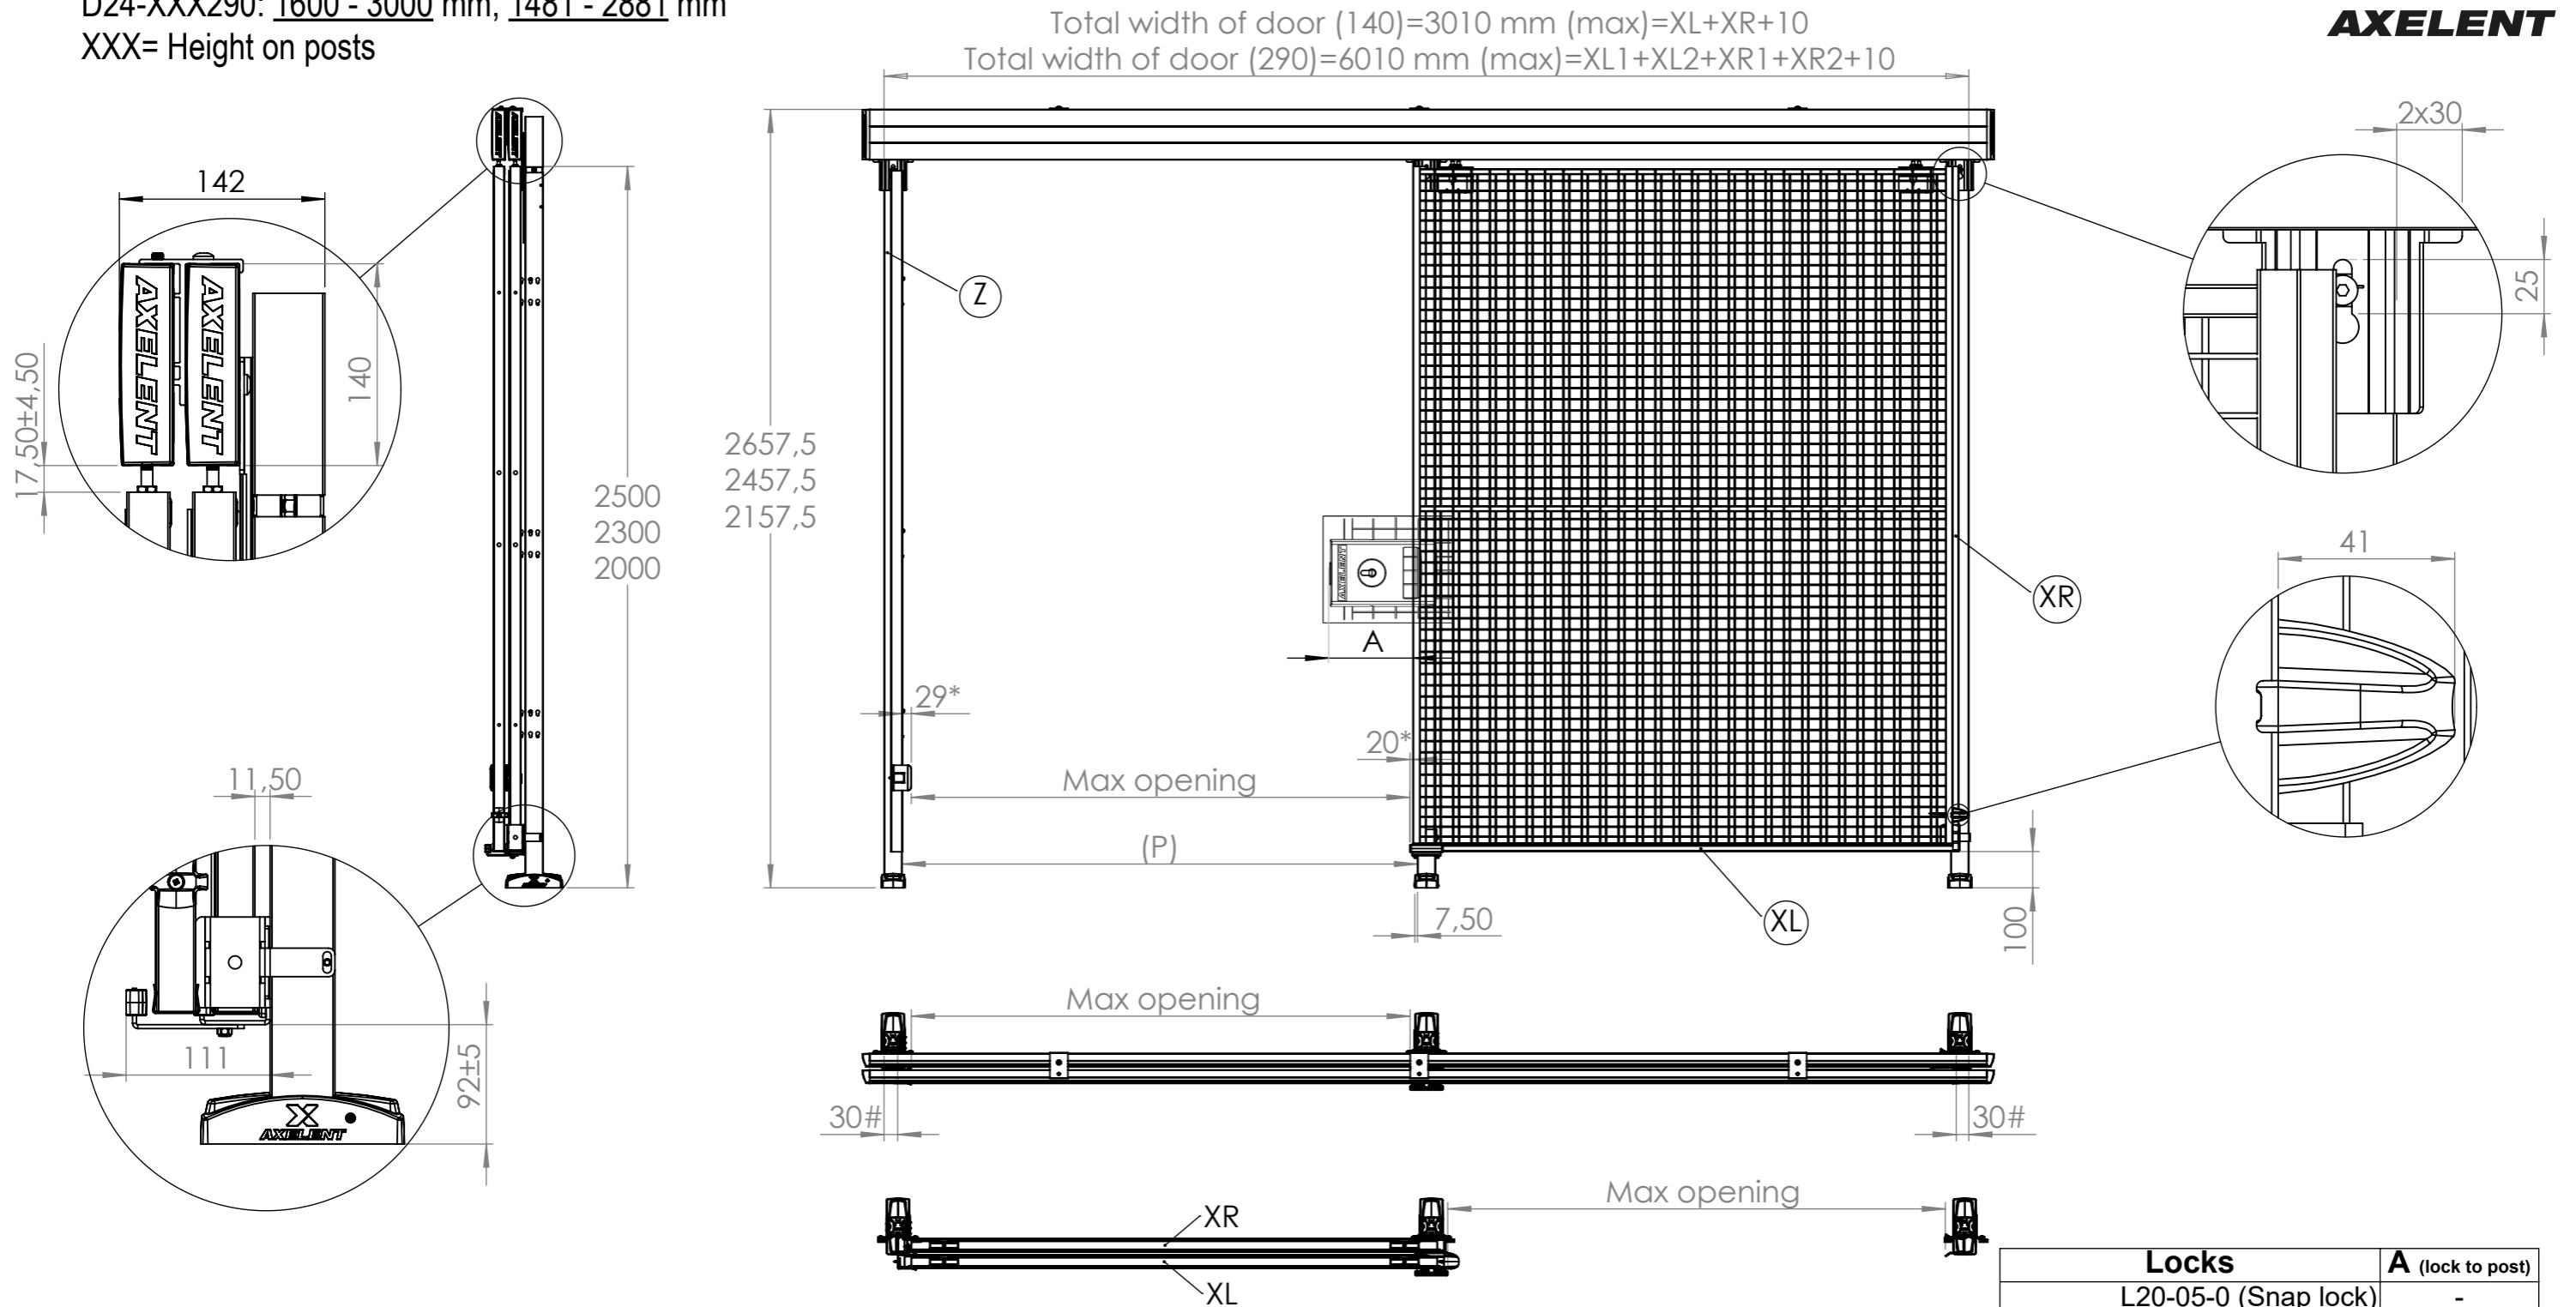

| |
|---|
| Max opening = X (L/R panel width) - 119 mm <i>(119 mm = (door accessories)* + 50 + 20 mm)</i> |
| (P) Post to post opening = X (L/R panel width) - 70 mm** <i>(** = panel in closed position overlapping posts (70 mm = 50 + 20))</i> |
| 30# = Dimension in door closed position |
| Max opening is affected by "A" mm with lock (without door accessories*) |

| Item No. | Art No. | Qty. | |
|----------|------------|------|-----|
| | | 140 | 290 |
| XL (1,2) | 322-XXXXXX | 1 | 2 |
| XR (1,2) | 322-XXXXXX | 1 | 2 |
| Z | P11-XXX | 3 | 3 |

| Locks | A (lock to post) |
|-------------------------------|------------------|
| L20-05-0 (Snap lock) | - |
| L20-05-2 (Hitch lock) | 105 mm |
| XIT-L/R01-301 (Cylinder lock) | - |
| XIT-L/R14-301 (Slam shut) | 215 mm |
| XIT-L/R09-301 (Electric) | - |
| L66-20/21-L/R (X-lock) | 190 mm |
| B-135 (MGB) | - |
| B-136 (MGB Escape Release) | 135 mm |