
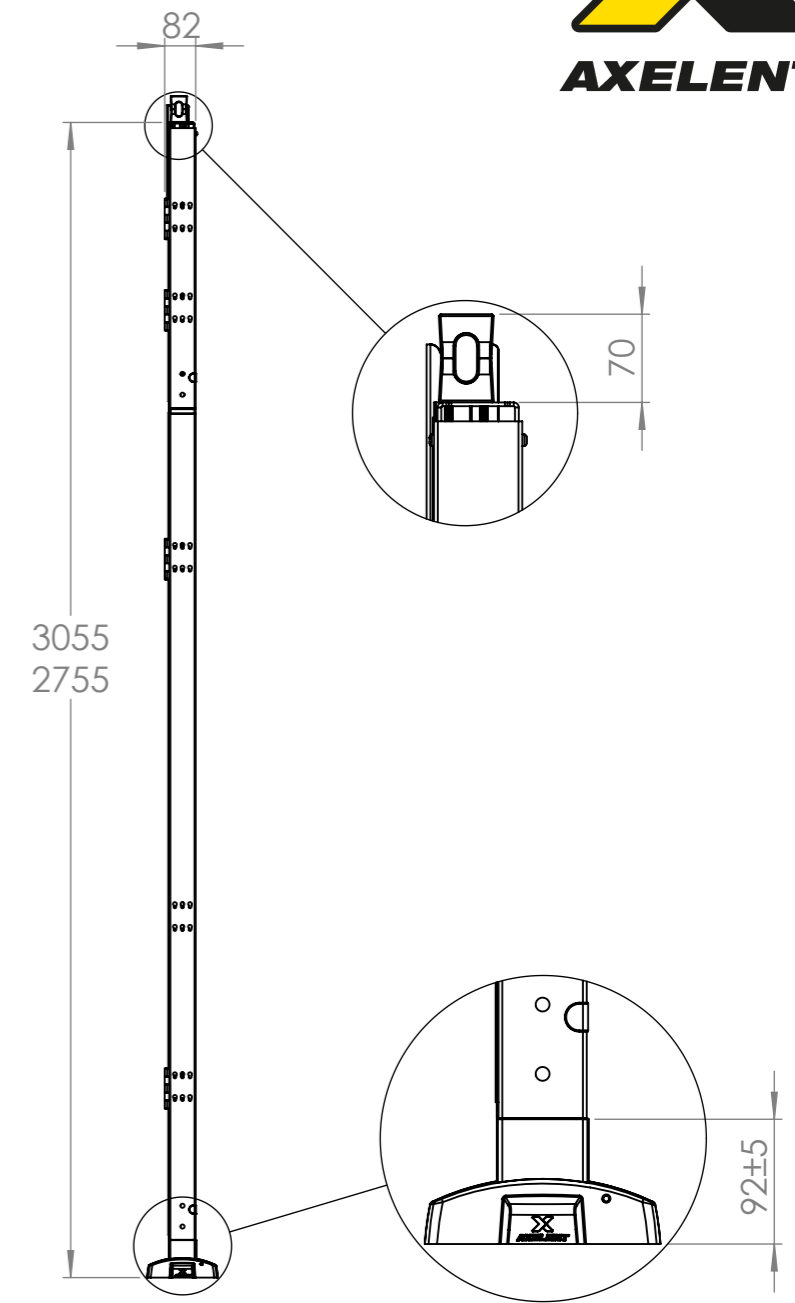


D32-275/305300

Door type: door panel width mm (X_{total}), max opening mm
 D32-275/305300: 500 - 3000 mm, 520 - 3020 mm

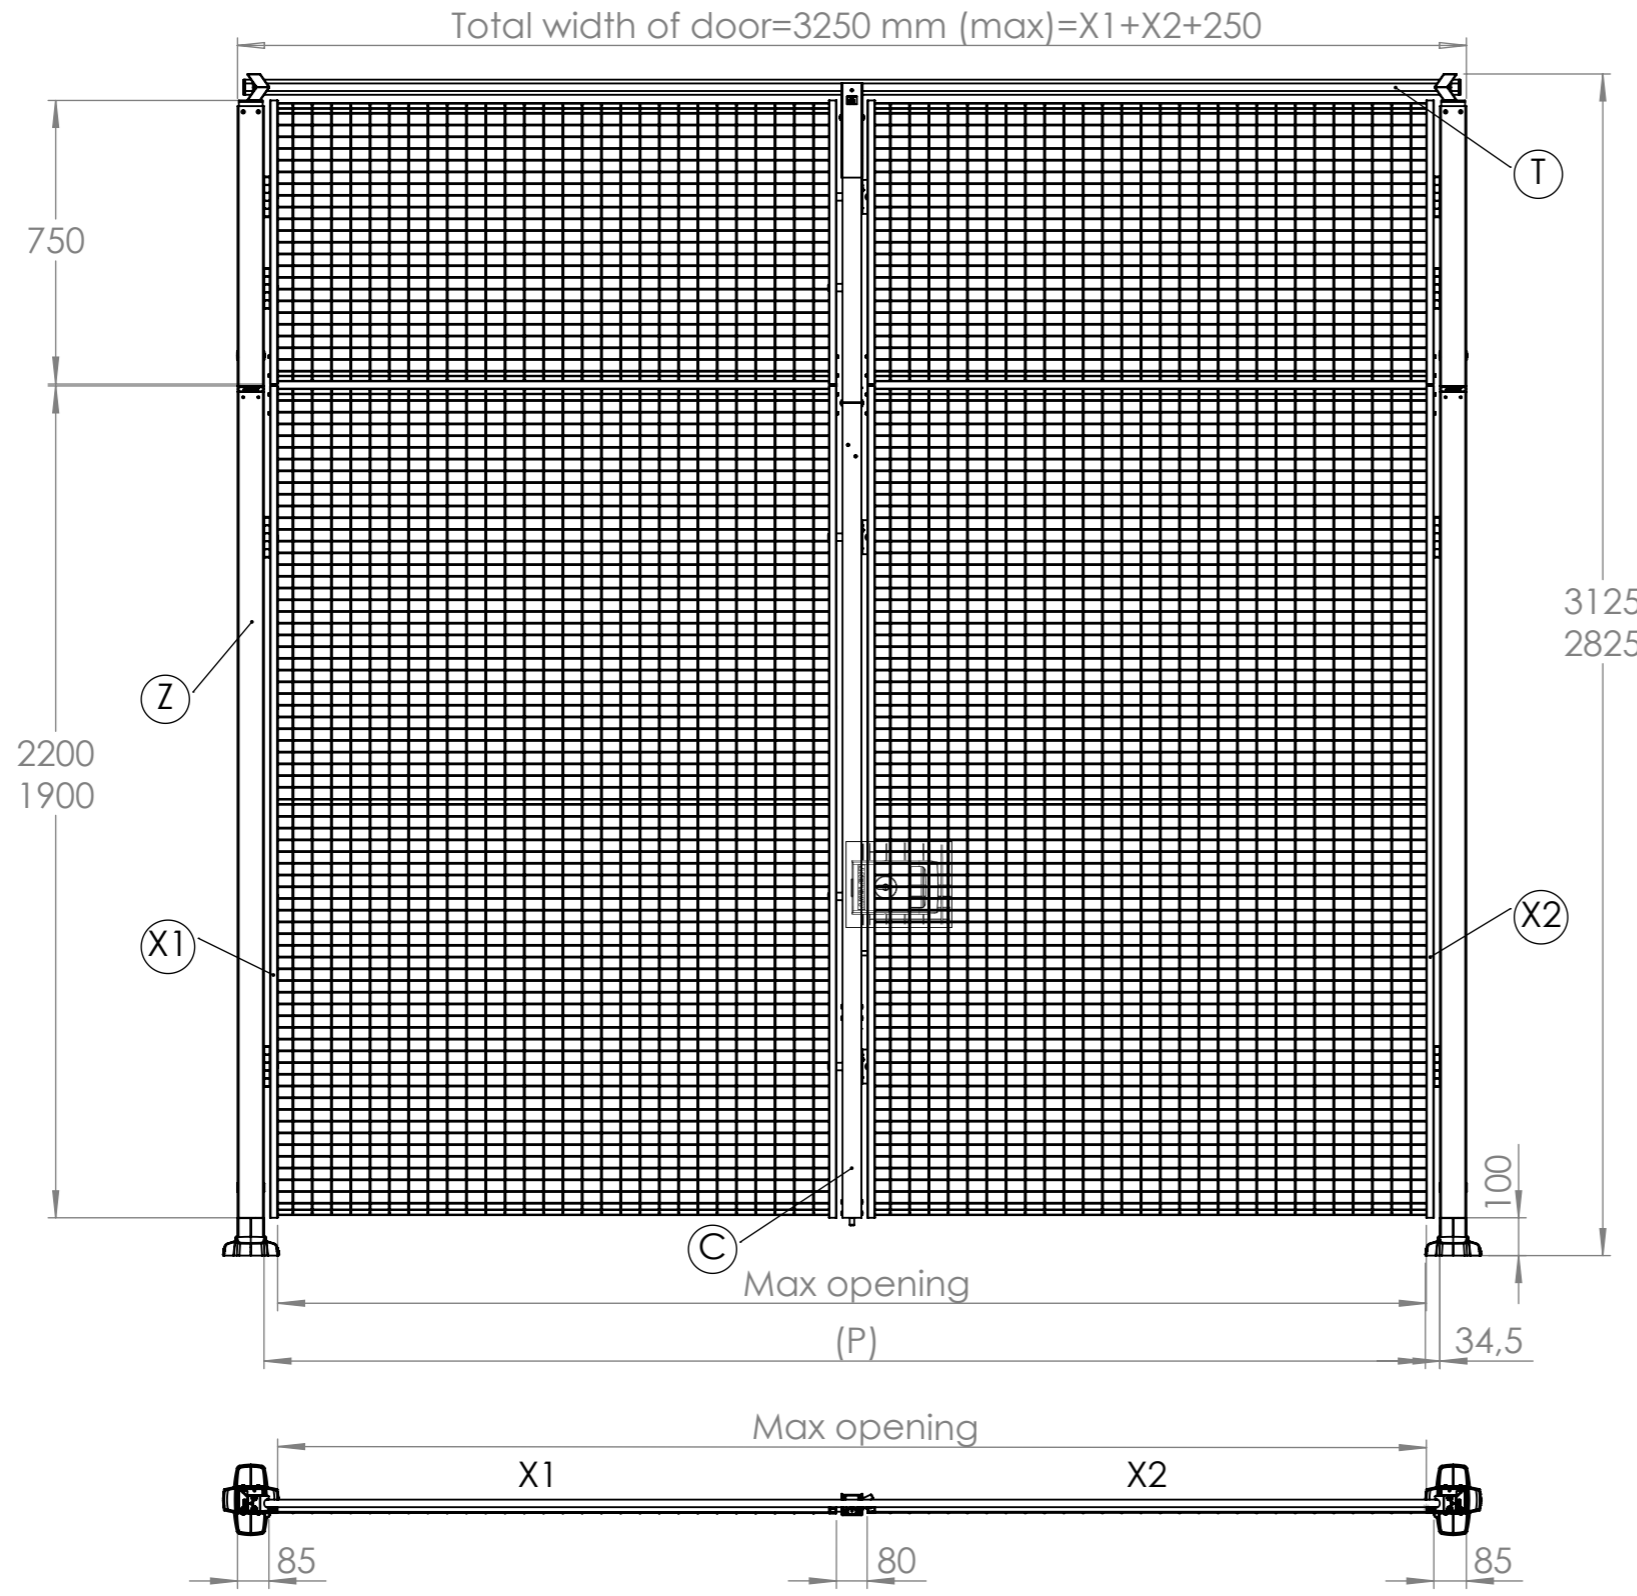

Max opening = X (total panel width) + 20 mm (20 mm = 50 + (15x2) - (30x2) mm)
 (P) Post to post opening = X (total panel width) + 110 mm** (**= center post + space between panels and posts in closed position (110 mm = 50 + (15x4) mm)
 Max opening is affected by "A" mm with lock (without door accessories*)

Item No.	Art No.	Qty. (+x)=extension
X (1,2)	322-XXXXXX	2 (+2)
C	D3M1-XXX	1
T	D3K-XXX	1
Z	P13-XXX	2

Locks	A (lock to post)
L20-05-0 (Snap lock)	-
L20-05-2 (Hitch lock)	-
XIT-L/R01-301 (Cylinder lock)	-
XIT-L/R14-301 (Slam shut)	-
XIT-L/R09-301 (Electric)	-
L66-20/21-L/R (X-lock)	-
B-135 (MGB)	-
B-136 (MGB Escape Release)	-