

# D29-XXX380/480/580

Door type: *door panel width mm (X<sub>total</sub>), max opening mm*

D29-XXX380: 4000 mm, 3808 mm

D29-XXX480: 5000 mm, 4808 mm


D29-XXX580: 6000 mm, 5808 mm

XXX= Height on posts

Total width of door (380)=5920 mm (max)=Y1+X1+X2+..+Y2+120

Total width of door (480)=7420 mm (max)=Y1+X1+X2+..+Y2+120

Total width of door (580)=8920 mm (max)=Y1+X1+X2+..+Y2+120

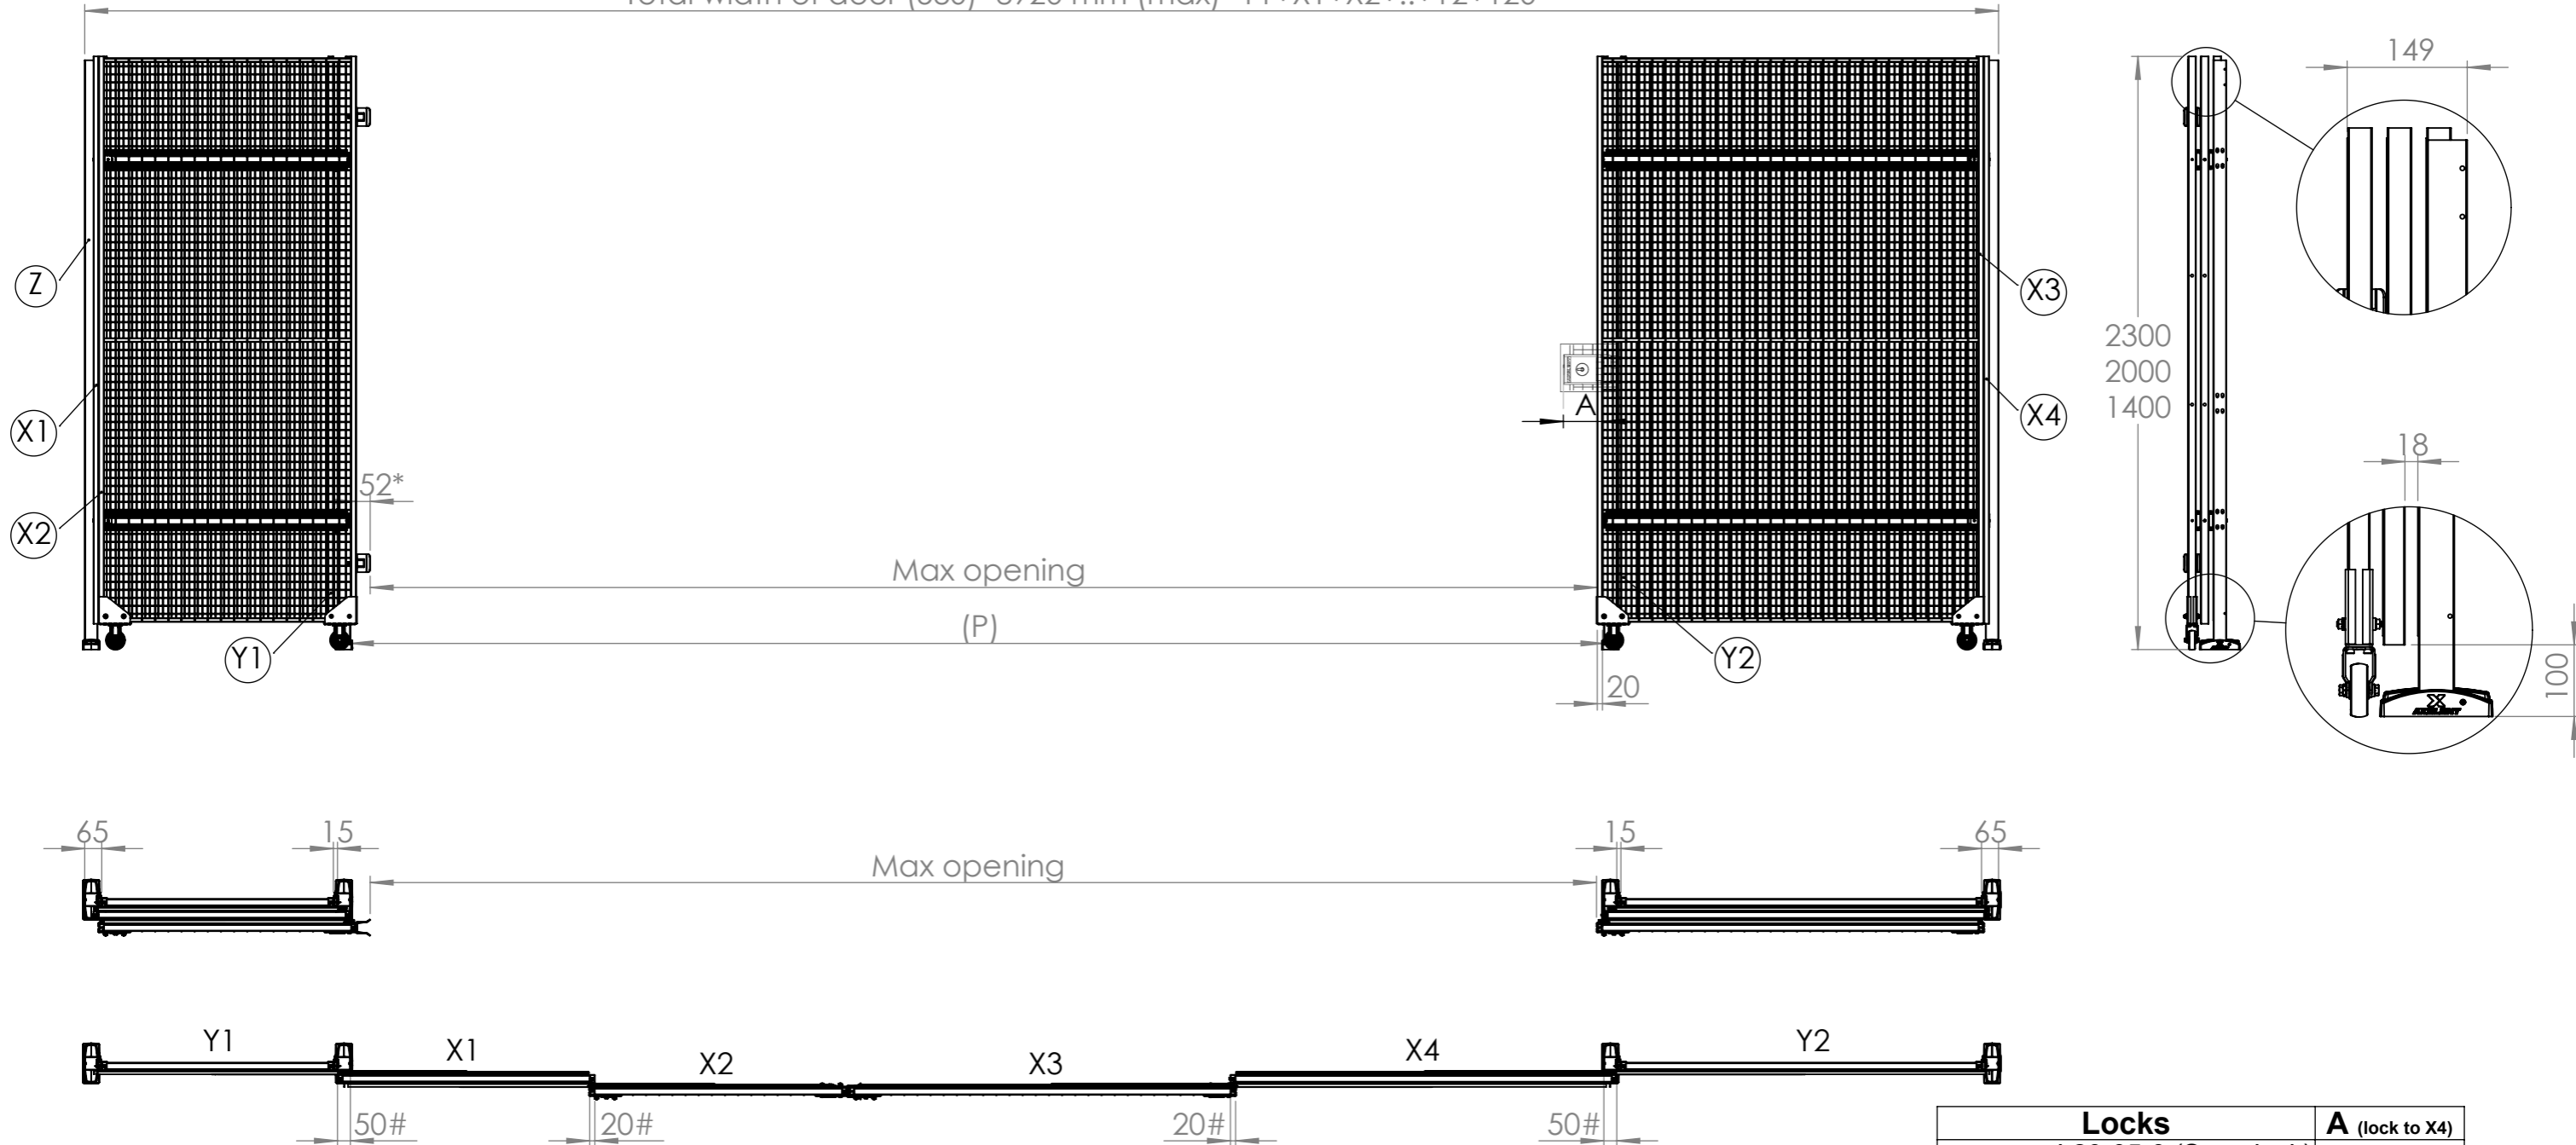

**Max opening = X (panel width) - 192 mm** (192 mm= (door accessories\*) + (20x2) (panels overlapping) + (50x2) (panels overlapping with posts) mm)

(P) Post to post opening = X (panel width) - 140 mm\*\* (\*\*= panels in closed position overlapping each other and posts (140 mm= (50x2) + (20x2))

50# and 20#= Dimensions in door closed position

Max opening is affected by "A" mm with lock (without door accessories\*)

Item No.	Art No.	Qty.		
		380	480	580
X (1,2..)	322-XXXXXX	4	4	4
Y (1,2)	322-XXXXXX	2	2	2
Z	P11-XXX	4	4	4

Locks	A (lock to X4)
L20-05-0 (Snap lock)	-
L20-05-2 (Hitch lock)	105 mm
XIT-L/R01-301 (Cylinder lock)	-
XIT-L/R14-301 (Slam shut)	215 mm
XIT-L/R09-301 (Electric)	-
L66-20/21-L/R (X-lock)	190 mm
B-135 (MGB)	-
B-136 (MGB Escape Release)	135 mm